


# CROSS WINDER - DOUBLE SPINDLE MACHINE

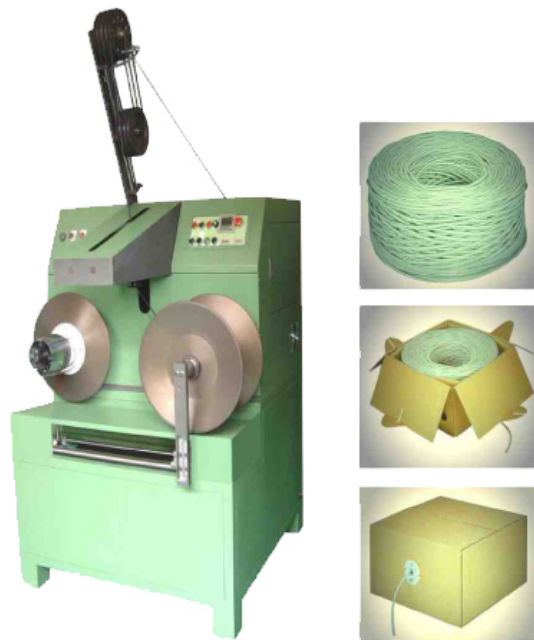

## Features:

- Touch screen operation
- Servo-Motor traverser and winding head
- PLC Control ensures tight smooth net coil.
- You can select non-hole winding or winding coil with a hole in the center.
- Size of the hole is user adjustable.
- NO ROYALTY FEES ever.

## Application

- All types of wire can be cross wound.
- The machine is especially designed for the winding of LAN cable. Cat. 5, Cat. 5e and Cat. 6.
- The processes including length counting, wire traversing, wire winding, and stop when preset length is reached.

Cross Winder - Double spindle

Model	Height	O.D.	I.D.	Line Speed
<b>FHPFT-100</b>	<b>250mm 9.8"</b>	<b>210-370mm 8.3"-15.6"</b>	<b>200mm 7.9</b>	<b>300 m/m 984 fpm</b>

Winding Head shall be made according to the specs. provided by the customer.

**Machine specification is subject to change without notice.**

**Progressive Machinery Inc. Wire Packaging, Wire Manufacturing Machines World Wide**

Progressive Machinery Inc.  
76 Ridley Rd. Bldg D, Suite 16  
St. Catharines, ON L2S 3Y8  
[www.progmach.com](http://www.progmach.com)  
[Contact Information](#)

North America **1-905-346-0998**  
Toll Free Tel: **1-866-918-0595**  
Fax: **1-905-641-1082**  
[Email Us Directly](#)