


7-19B TUBULAR TYPE STRANDING MACHINE

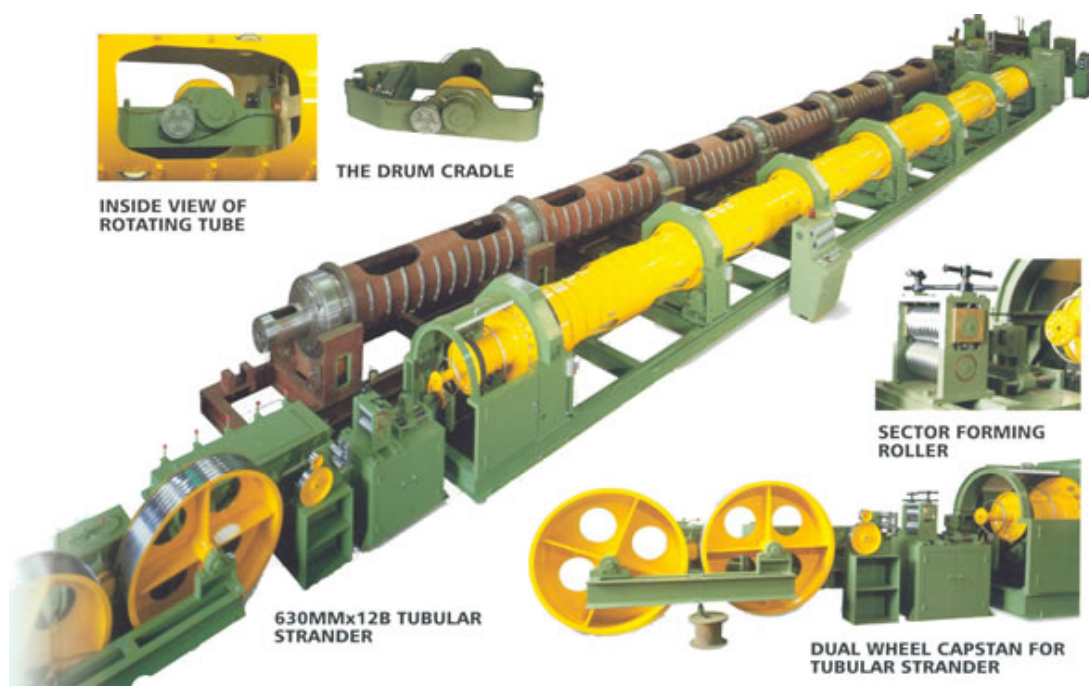

Features:

- Tubular type high speed stranding with back twist, for 7/12/19B copper/aluminum round & compact conductors and steel wires stranding.
- The wire pass tunnel is located on the surface of bobbin cartridge tube, which makes for easy stringing of the strand core.
- Cartridge bobbin tension can be controlled via powder brake, or slip band.
- The tubular is supported by integral bearing or GESADUR under roller according to customers' needs.
- Equipped with noise absorbing safety cover.
- PLC control of laying pitch pre-setting and auto- wire tension compensation control

7-19B TUBULAR TYPE STRANDING MACHINE

UNDER ROLLER TYPE TUBULAR TYPE STRANDING MACHINE					
Machine type		FHST-630	FHST-560	FHST-450	FHST-400
Rotor Rotating speed (RPM)	6B	600	600	700	700
	12B	450	450	550	55
Haul-off Capstan (mm)		800/1500	800/1500	600/1200	600/1200
Pay-off bobbin (mm)		1200	1200	800	800
Spooler bobbin (mm)		1500	1500	1200	1200
Main motor (DC/HP)		50/75	50/75	30/50	30/50
BEARING TYPE TUBULAR TYPE STRANDING MACHINE					
Machine type		FHSTB-630	FHSTB-560	FHSTB-450	FHSTB-400
Rotor Rotating speed (RPM)	6B	600	600	700	700
	12B	450	450	550	55
Haul-off Capstan (mm)		800/1500	800/1500	600/1200	600/1200
Pay-off bobbin (mm)		1200	1200	800	800
Spooler bobbin (mm)		1500	1500	1200	1200
Main motor (DC/HP)		50/75	50/75	30/50	30/50

The machine specification is subject to change without notice.

Progressive Machinery Inc. Wire Packaging, Wire Manufacturing Machines World Wide

Progressive Machinery Inc.
76 Ridley Rd. Bldg D, Suite 16
St. Catharines, ON L2S 3Y8

www.progmach.com

[Contact Information](#)

North America **1-905-346-0998**

Toll Free Tel: **1-866-918-0595**

Fax: **1-905-641-1082**

[Email Us Directly](#)